




# Acoustical Surfaces, Inc.

Soundproofing, Acoustics, Noise & Vibration Control Specialists

123 Columbia Court North • Suite 201 • Chaska, MN 55318  
(952) 448-5300 • Fax (952) 448-2613 • (800) 448-0121

Email: [sales@acousticalsurfaces.com](mailto:sales@acousticalsurfaces.com)  
Visit our Website: [www.acousticalsurfaces.com](http://www.acousticalsurfaces.com)

We Identify and **S.T.O.P.** Your Noise Problems

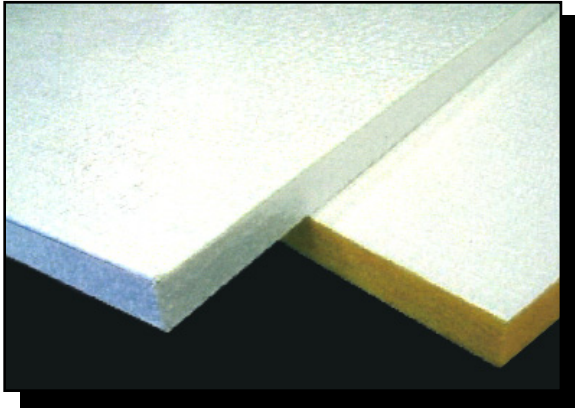

## Noise S.T.O.P.™ ULTRA-SAN SANITARY CEILING & WALL PANELS

- ✓ **Superior Acoustics**
- ✓ **Approved for Demanding Clean Room Requirements**
- ✓ **Cleanable/Washable**

Noise S.T.O.P.™ Ultra-Tile Clean Room Ceiling Tiles offer superior acoustics while meeting demanding clean room requirements. Noise S.T.O.P.™ Ultra-Tiles are available in either faced only model or completely encapsulated model. The mil reinforced white mylar is USDA & FDA approved for clean room applications.

**MATERIAL:** 6-7# PCF rigid fiberglass core. **FINISHES:** 1 mil reinforced white mylar.

**APPLICATIONS:** Typical uses include food processing plants, veterinary clinics, cafeterias and kitchen areas, restaurants.

**SIZE:** Standard sizes of 2' x 2' or 2' x 4'.

**THICKNESS:** 1" or 2".

**INSTALLATION:** Easily installed with a 15/16" grid – wall mounted.

**FACING OPTIONS:** Faced 1 side only. Faced + wrapped edges completely encapsulated.

**FLAMMABILITY:** ASTM E-84 Class 1-A Nonflammable components. Flame Spread: 25, Smoke Developed: 50

**SUBSTRATE:** 6-7# PCF rigid fiberglass core.  
**MOUNTING:** Grid supplied by others.  
**FINISHES:** 1 mil reinforced white mylar.  
**EDGE DETAIL:** Square.  
**WEIGHTS:** .5 lbs. S.F. – 1". 1.0 lbs. S.F. – 2".  
**ACOUSTICAL:** NRC Rating: 1".....0.85, 2" .....1.15.